

Fine Fissured

PERFORMANCE SERIES

Mineral Fiber Ceilings

Features & Benefits:

- 100% non-directional fissure pattern.
- Variety of edge detail options and panel sizes.
- Available in 12" X 12" tiles for glue up and concealed grid applications.
- High humidity and sag-resistant.
- No added formaldehyde.*

Applications:

- Hospitality
- Retail
- Offices
- Education
- Healthcare
- Restaurants

Relative Installed Cost:

\$\$\$\$

PERFORMANCE SERIES



*See "CHPS" explanation on page 165.

LEED 2009: NC, CI, & Schools							LEED 2009 for Schools	
Optimize Energy	Building Reuse	Waste Management	Recycled Content	Regional Materials	Renewable Materials	Daylight & Views	Acoustic Performance	CHPS Low-emitting
◆		◆	◆	◆	◆	◆		◆

Fine Fissured

PERFORMANCE SERIES

Mineral Fiber Ceilings




Attributes:


ITEM NUMBER	NOMINAL SIZE (Inches)	EDGE DETAIL	UL CLASSIFIED		LR	RECYCLED CONTENT %
			NRC	CAC		
SAFETONE® CLASS A						
HHF-150	24 x 24 x 5/8	Narrow Reveal	0.55	33	0.84	45
HHF-154	24 x 24 x 5/8	Reveal	0.55	33	0.84	45
HHF-157	24 x 24 x 5/8	Trim	0.55	33	0.84	45
HHF-194	24 x 48 x 5/8	Reveal	0.55	35	0.84	45
HHF-197	24 x 48 x 5/8	Trim	0.55	35	0.84	45
HHF-462	12 x 12 x 3/4	Bevel, Kerfed	0.55	42	0.84	45
PROTECTONE® (For specific UL fire resistant time-rated assemblies)						
PFF-154	24 x 24 x 5/8	Reveal	0.55	35	0.84	47
PFF-157	24 x 24 x 5/8	Trim	0.55	35	0.84	47
PFF-197	24 x 48 x 5/8	Trim	0.55	40	0.84	47

ASTM E 1264 Classification: Type III, Form 2, Pattern C D

Edge Details:

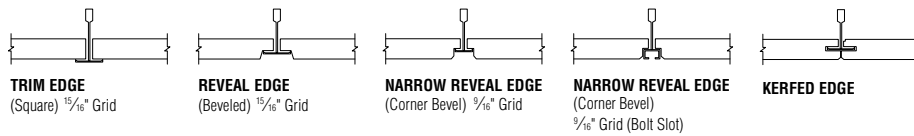

Standard Sizes:

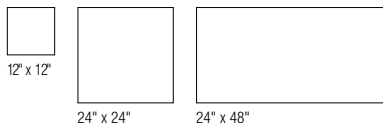

Colortone Options:

IN ADDITION TO TRADITIONAL WHITE, YOU CAN MAKE AN IMPACT WITH ONE OF OUR 5 STANDARD COLORTONES, FOR ITEM NUMBERS: HHF-154, HHF-157, HHF-197



Product Features at a Glance:

- COLOR AVAILABILITY
- HIGH LIGHT REFLECTANCE
- PROTECTONE®/UL FIRE RESISTANCE
- RESISTS SAGGING
- BIOSHIELD™ BIOSHIELD TREATMENT INCLUDED FOR ADDED MOLD AND MILDEW RESISTANCE.



CertainTeed